



Polydox

Acrylic Stone Varnish



Covering Power: 13-15 m²/lt



Drying: 1 - 1½ hour



Dilution: 0% or up to 10% with Vechro thinner No1



Recoatability: 6 hours



Packing: 750ml, 2,5lt

Application: Brush, Spraygun, Roller


GENERAL CHARACTERISTICS

High quality stone varnish based on special acrylic resins, with very good adherence, hardness and good wear resistance. It protects the surfaces against weather conditions and yellowing.

POLYDOX is suitable for non-absorbent rocks, Karystos' stones, marbles, firebricks, ceramic tiles etc. Suitable also for interior surfaces. It gives satin to gloss finish depending on the absorbency of the surface.

TECHNICAL CHARACTERISTICS

Texture	Semigloss to satin depended on the surface.
Specific weight	0,90- 0,94 kg/lt.
Covering power	7- 9 m ² /lt per layer, depending on the surface.
Dilution	Ready for use or 10% on volume with THINNER No1 of VECHRO, if required. Attention! Avoid to dilute with thinner SMALTOLUX WHITE SPIRIT.
Drying	1 -1 ½ hours touch free.
Recoatability	Recoatable 5-6 hours after first layer's application. These times prolong under cold and wet weather conditions.
VOC class	"Binding primers". Type SB. VOC limit = 750 gr/lt. Max VOC of product ready for use = 710 gr/lt. VOC: organic volatile compounds with boiling point < 250°C.
Shades	Transparent.

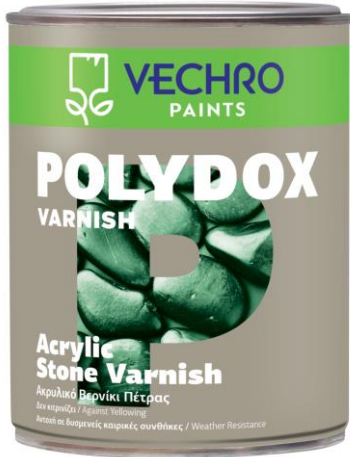

SURFACE PREPARATION

Clean the surface of dust, oil, grease, petrol, paraffin etc. The surfaces to be paint must be clean and absolutely dry.

APPLICATION

Stir well before use. Apply one to two coats of POLYDOX.

CLEANING EQUIPMENT

While working keep your equipment wet, either in the pot, or in the paint lauder. Strain well your tools from paint back to the pot and clean immediately with thinner No1 of VECHRO and water and soap.

APPLICATION CONDITIONS

Temperature 8-30 °C and relative humidity lower than 80%. Contrary weather conditions may degrade paint's quality.

STORAGE

Store in a cool place, protect from freezing and sun exposure. Close the can well after application to keep in good condition. Recover unused paint for re-use. Reuse of paint can effectively minimize the product's life cycle environmental impact.

LABELLING

More information in Safety Data Sheets (MSDS).

SAFETY

Read the tag on the back side of the product. Keep out of the reach of children.



The technical data and instructions included in this technical leaflet are based on audits of confidential laboratories and result of the knowledge and experience of the company's scientific staff. The quality of the product is guaranteed by the company, which is aligned with the requirements of ISO 9001, 14001 and EMAS. As a producer, we are not responsible for any damage or damage caused if the product has not been used for proper application and in accordance with its instructions for use.